

The GSV0g is a universal communicator with functions that change depending on which of the two available firmware versions is loaded. The main differences between the firmware versions are described below.



GSV0G v1.40.dfu

Control panels supported by the data interface:

- ♦ **SECOLINK** (control panels: PAS8xx, Pxx)
- ♦ **DSC** (control panels: PC5xx, PC5xxx, PC14xx, PC1565, PC16xx, PC18xx)
- ♦ **PARADOX** (control panels: SP4xxx, SP6xxx, SP7xxx, EVOxxx, MG5xxx, SP5500+, SP6000+, SP7000+)

Voice guide: **No**

Voice messages in case of alarm: **No**



GSV0G\_(V) v1.40.dfu

Control panels supported by the data interface:

- ♦ **DSC** (control panels: PC5xx, PC5xxx, PC14xx, PC1565, PC16xx, PC18xx)
- ♦ **PARADOX** (control panels: SP4xxx, SP6xxx, SP7xxx, EVOxxx, MG5xxx, SP5500+, SP6000+, SP7000+)

Voice guide: **Yes**


Default voice guide language: **EN**

Other available voice guide languages: **ES, FR, GR, HU, IT, LT, PT, RU, SK**.

Procedure for changing the voice guide language:

The SMS must begin with the PIN code, followed by the desired command. To change the voice guide language, use the command `VOICEDOWNLOAD:[language index]`. For example, to change the language to Italian (IT), the full command will be `VOICEDOWNLOAD:IT`.

The download process can take up to 15 minutes and use approximately 1 MB of mobile data.

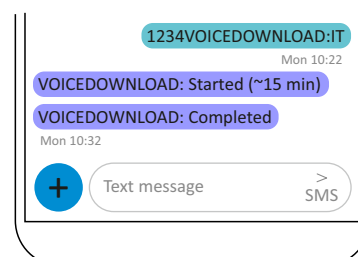

Voice messages in case of alarm: **Yes**

If the communicator is programmed to call in case of an alarm, it will, by default, announce only the zone number (e.g., „Zona 1“). If it's necessary to hear the actual name of the zone, the communicator must be configured by sending specific SMS commands in a defined format. To generate the zone name, the communicator will use the language downloaded via the VOICEDOWNLOAD command. In this example, the language will be Italian.

The SMS must begin with the PIN code, followed by the desired command. To assign a voice file to a zone, use the command `VOICEZ:[zone number]=[zone name]`. For example, to assign the name „Soggiorno“ (Italian for „Living room“) to zone 4, the full command will be `VOICEZ:4=Soggiorno`.

The download process can take up to 15 minutes, depending on the text length.

