


DHI-VTH1023J

2-wire Hybrid Indoor Monitor



EACH

- High-definition user interface.
- Supports 2-wire communication.
- Features sleep mode and the quick wake-up function.
- Video and audio messages can be left for unanswered calls, and you can take snapshots (an SD card is required).
- Supports configuring the main and sub indoor monitor and receiving group calls from the door station.



Technical Specification

System

Main Processor	Embedded Processor
Operating System	Embedded Linux operating system
Button Type	Touch button

Basic

Screen Type	Non-touchscreen
Display Screen	7.0" TFT
Screen Resolution	1024 (H) × 600 (V)
Audio Input	1 channel
Audio Output	Built-in speaker
Audio Mode	Two-way audio (half-duplex)

Function

Communication Mode	Analog
Leave Videos	Yes (SD card inserted in VTH is needed)
DND Mode	Do not disturb mode can be set
Number of Extensions	2
Storage	Supports Micro SD card storage, up to 64 GB

Performance

Casing Material	PC + ABS
-----------------	----------


General

Appearance Color	White
Power Supply	The power is provided by the distributor.
Installation	Surface Mount
Certifications	CE
Accessory	Includes: Power cord and bracket
Product Dimensions	133.9 mm × 182.7 mm × 20.7 mm (5.27" × 7.19" × 0.82")
Operating Temperature	-10 °C to +55 °C (+14 °F to +131 °F)
Operating Humidity	10%–95% (RH)
Operating Altitude	0 m–3000 m (0 ft–9842.52 ft)
Power Consumption	≤1 W (standby), ≤6.3 W (working)
Storage Temperature	0 °C to +40 °C (+32 °F to +104 °F)
Storage Humidity	30%–75%
Operating Environment	Indoor


Ordering Information

Type	Model	Description
VTH	DHI-VTH1023J	2-wire Analog Indoor Monitor

Installation

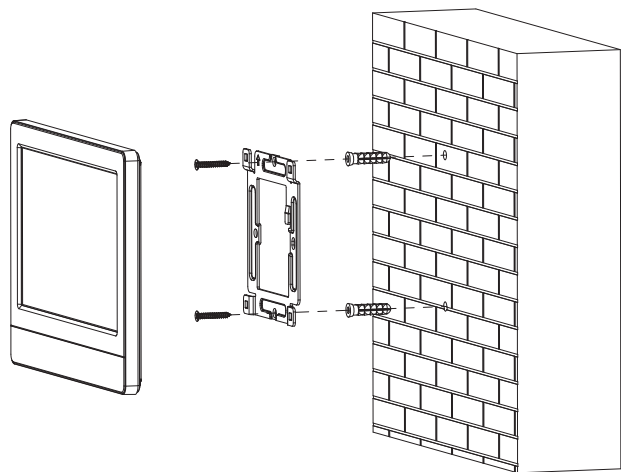

Dimensions (mm[inch])

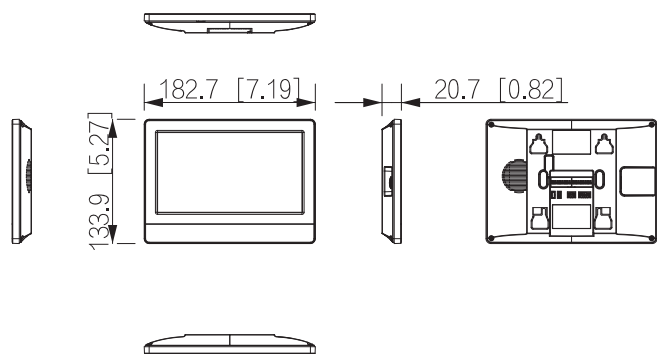

Application

