

DHI-VTNC2113C

2-wire Hybrid Controller






- Includes four 2-wire ports for connecting to the indoor monitor and two 2-wire ports for the door station.
- Supports cascading 10 devices.
- Supports connecting to 100 analog indoor monitors and 20 hybrid indoor monitors.
- Includes an RJ-45 port and supports accessing the device webpage to perform system configuration and management.
- Supports guide rail mount.


Technical Specification		
Technical Specification		
System		
Main Processor	Embedded Processor	
Operating System	Embedded Linux operating system	
Network Protocol	UDP;TCP;IPv4;DNS;SSH	
Function		
Communication Mode	Analog	
Web Configuration	Yes	
Performance		
Casing Material	PC + ABS	
Port		
Network Port	1 × 100 Mbps Ethernet port	
General		
Appearance Color	White	
Power Supply	48–53 VDC, 4 A	

Power Adapter	Optional
Installation	Guide Rail Mount
Certifications	CE
Product Dimensions	117 mm × 191 mm × 38 mm (4.61" × 7.52" × 1.50")
Operating Temperature	-10 °C to +55 °C (+14 °F to +131 °F)
Operating Humidity	10%–95%, non-condensing
Operating Environment	Indoor
Operating Altitude	0-3000 m (0-9842.52 ft)
Power Consumption	≤4 W (standby), ≤100 W (working)
Storage Temperature	0 °C to +40 °C (+32 °F to +104 °F)
Storage Humidity	30%–75%


Ordering Information			
Туре	Model	Description	
VTNC	DHI-VTNC2113C	2-wire Controller	

Installation





Dimensions (mm[inch])

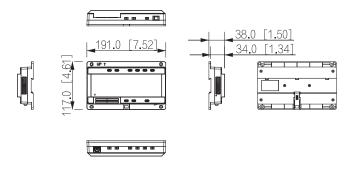

Application

