


FEI-360IPN

IR 6MP Vandal-Proof Fish-Eye Camera

Ideal for large open spaces, this 6MP Panoramic Fisheye Anti-Vandal camera can capture footage at a wide angle of 360°. The camera includes a built-in microphone, Digital WDR, BLC, HLC, and 3D-DNR for poor light conditions. Our Fisheye camera FEI-360IPN can do the work of multiple fixed focus lens cameras.

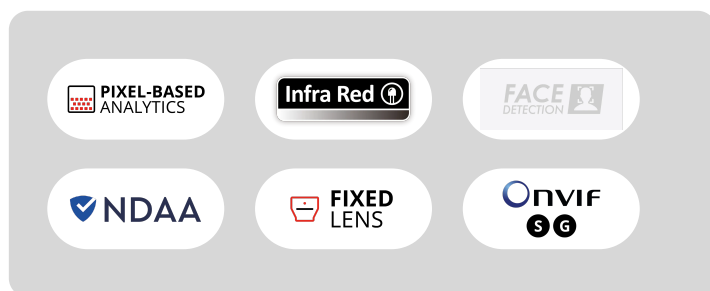

MAIN FEATURES

- FEI-360IPN
- Sensor: 1/2.9" CMOS (3096 x 2196 – 16:9)
- Resolution: 2160×2160 (1:1) 25/30FPS (5MP)
- Lens: 1.07mm (360° for Ceiling Mount / 180° For Wall Mount)
- True Day&Night – ICR
- Illumination: 15m (6 High Power Wide Angle IR LED)
- Compression: H.265 / H.264 / MJPEG
- No
- Digital WDR, BLC, HLC, ROI
- SD Card: Event/Schedule Record (Up to 256GB)
- Alarm in + Alarm out
- Built-In Microphone + Audio Input + Audio Output
- ONVIF: Profile S/G
- IK10
- Weight: ~605g
- Power: DC12V/~420mA / PoE/~5.4W



<https://provision-isr.com>

SPECIFICATIONS

NDAA Compliant	
NDAA Compliant	Yes
Video	
Image Sensor	1/2.9" CMOS (3096 x 2196 - 16:9)
Effective Pixels	2160x2160 (1:1)
Electronic Shutter	1/25s ~ 1/100000s
Day & Night	ICR
Min. Illumination	Day: 0.1lux / Night: 0.068lux (@F2.0, AGC on) 0lux with IR on
Audio	
Audio compression	G.711A/G.711U
Communication	Two-Way Audio
Image	
Image Settings	AWB, AGC Adjustable, Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable
Image Enhancement	Digital WDR, BLC, HLC, ROI
Noise Reduction	3D-DNR
Image Orientation	360
Privacy Zone	Yes
Events and Analytics	
Analytics	No
Motion Detection	Yes
Compression	
Resolution	5MP(2160x2160), 4MP(1920x1920), 2MP(1440x1440), 960x960, 480x480
Frame Rate	1-25/30FPS
Video Compression	H.265 / H.264 / MJPEG**

Multi-Stream	Master Stream: 5MP(2160x2160), 4MP(1920x1920), 2MP(1440x1440) (1~30fps) Substream: 960x960, 480x480 (1~30fps) Third Stream: 960x960, 480x480 (1~30fps)
Bit Rate	64Kbps ~ 5Mbps@H.265 / 64Kbps ~ 5Mbps@H.264
Encode Mode	VBR/CBR
Image Quality	Five levels under VBR; Free adjustment under CBR

Lens	
Lens (Field of View)	1.07mm (360° for Ceiling Mount / 180° For Wall Mount)
Iris	Fixed Iris
Lens Mount	M12 Mount

Network	
User Access	Supports simultaneous monitoring of up to 10 users with multi-stream real-time transmission
Network Protocol	IPv4, IPv6, TCP, UDP, DHCP, NTP, DDNS, 802.1X, RTSP, Multicast, UPnP, Email, FTP, HTTPS, QoS
Remote Monitoring	IE Browsing, Ossia VMS Software, Provision Cam2 Mobile App
Ethernet	100Mbps
ONVIF	Profile S/G

Connectivity	
Network	RJ45 (+PoE)
Audio Connectivity	Built-In Microphone + Audio Input + Audio Output
Alarm	Alarm in + Alarm out
SD Card	Event/Schedule based Main/Substream recording (Up to 256GB)
Wiegand	Yes
Power	DC Socket
Analog Video Output	CVBS (BNCx1)

Housing	
---------	--

PoE	Yes
Illumination	15m (6 High Power Wide Angle IR LED)
Power Supply	DC12V/~420mA / PoE/~5.4W
Protection Rate	IK10
Work Environment	-30°C~60°C, 10%~90% Humidity
Bracket	No
Dimensions	Φ130mm×41mm
Weight (gross)	~605g
Hard Reset Button	Yes