
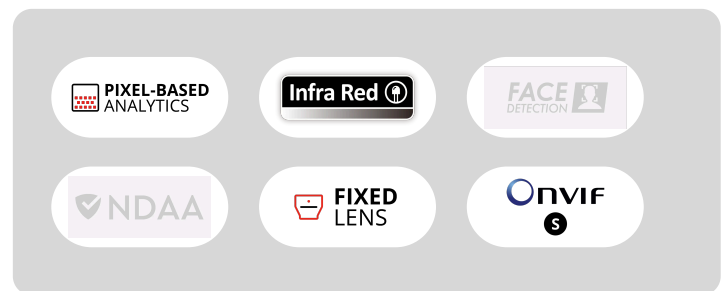


# IV-320IP-37

## 10m IR 2MP Pinhole Dummy PIR Hidden Camera

This dummy PIR 2MP camera is designed to cover the need for concealed cameras; It covers short-distance surveillance (up to 10m) for indoor scenarios. With its excellent performance, reliability, and affordable price, the IV-320IP-37 camera is the perfect solution for concealed installations.

**2**  
MP

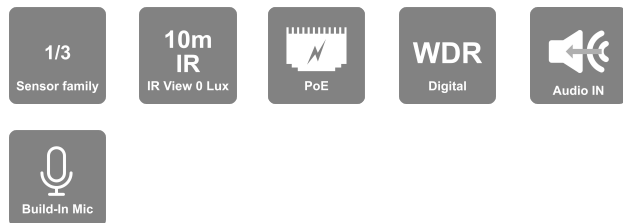

## MAIN FEATURES

- IV-320IP-37
- Sensor: 1/2.8" CMOS (16:9)
- Resolution: 1920×1080 25/30FPS (2MP)
- Lens: 3.7mm (83°)
- True Day&Night – ICR
- Illumination: 10m (20 invisible IR LED)
- Compression: H.265 / H.264 / MJPEG
- General Analytics: Camera Tampering
- Standard Analytics (Pixel-Based): Line Crossing, Sterile Area
- DWDR, BLC, HLC, ROI
- SD Card: Event/Schedule Record (Up to 128Gb)
- Built-in Microphone + Audio input
- ONVIF: Profile S
- None
- Weight: 269g
- Power: DC12V/~420mA / PoE/~4.8W



<https://provision-isr.com>

## SPECIFICATIONS

| 3rd Party Cyber Protection |   |
|----------------------------|---|
| General                    | N/A   |
| Protection Methods         | N/A   |
| NDAA Compliant             |   |
| NDAA Compliant             | No  |
| Video                      |   |
| Image Sensor               | 1/2.8" CMOS (16:9)  |
| Effective Pixels           | 1920x1080   |
| Electronic Shutter         | 1/25s ~ 1/100000s   |
| Day & Night                | ICR   |
| Min. Illumination          | Day: 0.1lux / Night: 0.007 lux@F2.0,AGC on; 0 lux with IR on                                      |
| Audio                      |   |
| Audio compression          | G.711A/G.711U   |
| Communication              | One-Way Audio   |
| Image                      |   |
| Image Settings             | AWB, AGC Adjustable, Exposure Mode (Auto) Sharpness, Saturation, Brightness & Contrast Adjustable |
| Image Enhancement          | DWDR, BLC, HLC, ROI   |
| Noise Reduction            | 3D-DNR  |
| Image Orientation          | Mirror/Flip   |
| Privacy Zone               | Yes   |
| Events and Analytics       |   |
| Analytics                  | General Analytics: Camera Tampering Standard Analytics (Pixel-Based): Line Crossing, Sterile Area |
| Motion Detection           | Yes   |
| Compression                |   |

|                          |  |
|--------------------------|--|
| <b>Resolution</b>        | 2MP / 1MP / D1 (704x576) / QVGA (480x240) / CIF (352x288)                                  |
| <b>Frame Rate</b>        | 1-25/30FPS   |
| <b>Video Compression</b> | H.265 / H.264 / MJPEG**  |
| <b>Multi-Stream</b>      | Master Stream: 2MP (1920x1080) / 1MP (1280x720) (1~30fps) Substream: QVGA/D1/CIF (1~30fps) |
| <b>Bit Rate</b>          | 64Kbps ~ 4Mbps@H.265 / 64Kbps ~ 6Mbps@H.264  |
| <b>Encode Mode</b>       | VBR/CBR  |
| <b>Image Quality</b>     | Five levels under VBR; Free adjustment under CBR   |

| Lens                        |             |
|-----------------------------|-------------|
| <b>Lens (Field of View)</b> | 3.7mm (83°) |
| <b>Iris</b>                 | Fixed Iris  |
| <b>Lens Mount</b>           | M12 Mount   |

| Network                  |   |
|--------------------------|---|
| <b>User Access</b>       | Supports simultaneous monitoring of up to 3 users with multi-stream real-time transmission        |
| <b>Network Protocol</b>  | IPv4, IPv6, TCP, UDP, DHCP, NTP, DDNS, 802.1X, RTSP, Multicast, UPnP, Email, FTP, HTTPS, QoS, P2P |
| <b>Remote Monitoring</b> | IE Browsing, Ossia VMS Software, Provision Cam2 Mobile App  |
| <b>Ethernet</b>          | 100Mbps   |
| <b>ONVIF</b>             | Profile S   |

| Connectivity              |   |
|---------------------------|---|
| <b>Network</b>            | RJ45 (+PoE)   |
| <b>Audio Connectivity</b> | Built-in Microphone + Audio input                           |
| <b>Alarm</b>              | No  |
| <b>SD Card</b>            | Event/Schedule based Main/Substream recording (Up to 128Gb) |
| <b>Wiegand</b>            | No  |

|                     |                              |
|---------------------|------------------------------|
| Power               | DC Socket                    |
| Analog Video Output | No                           |
| Housing             |                              |
| PoE                 | Yes                          |
| Illumination        | 10m (20 invisible IR LED)    |
| Power Supply        | DC12V/~420mA / PoE/~4.8W     |
| Protection Rate     | None                         |
| Work Environment    | -20°C~50°C, 10%~90% Humidity |
| Bracket             | 3-Axis Bracket               |
| Dimensions          | 95x69.5x58mm                 |
| Weight (gross)      | 269g                         |
| Hard Reset Button   | Yes                          |

## DIMENSIONS

