

Superior product line

Ajax SpaceControl S Jeweller

Wireless key fob with a panic button and control for security modes. Superior edition

Ajax SpaceControl S Jeweller has a silicon overlay over the light indicators. This upgrade provides improved protection against humidity.












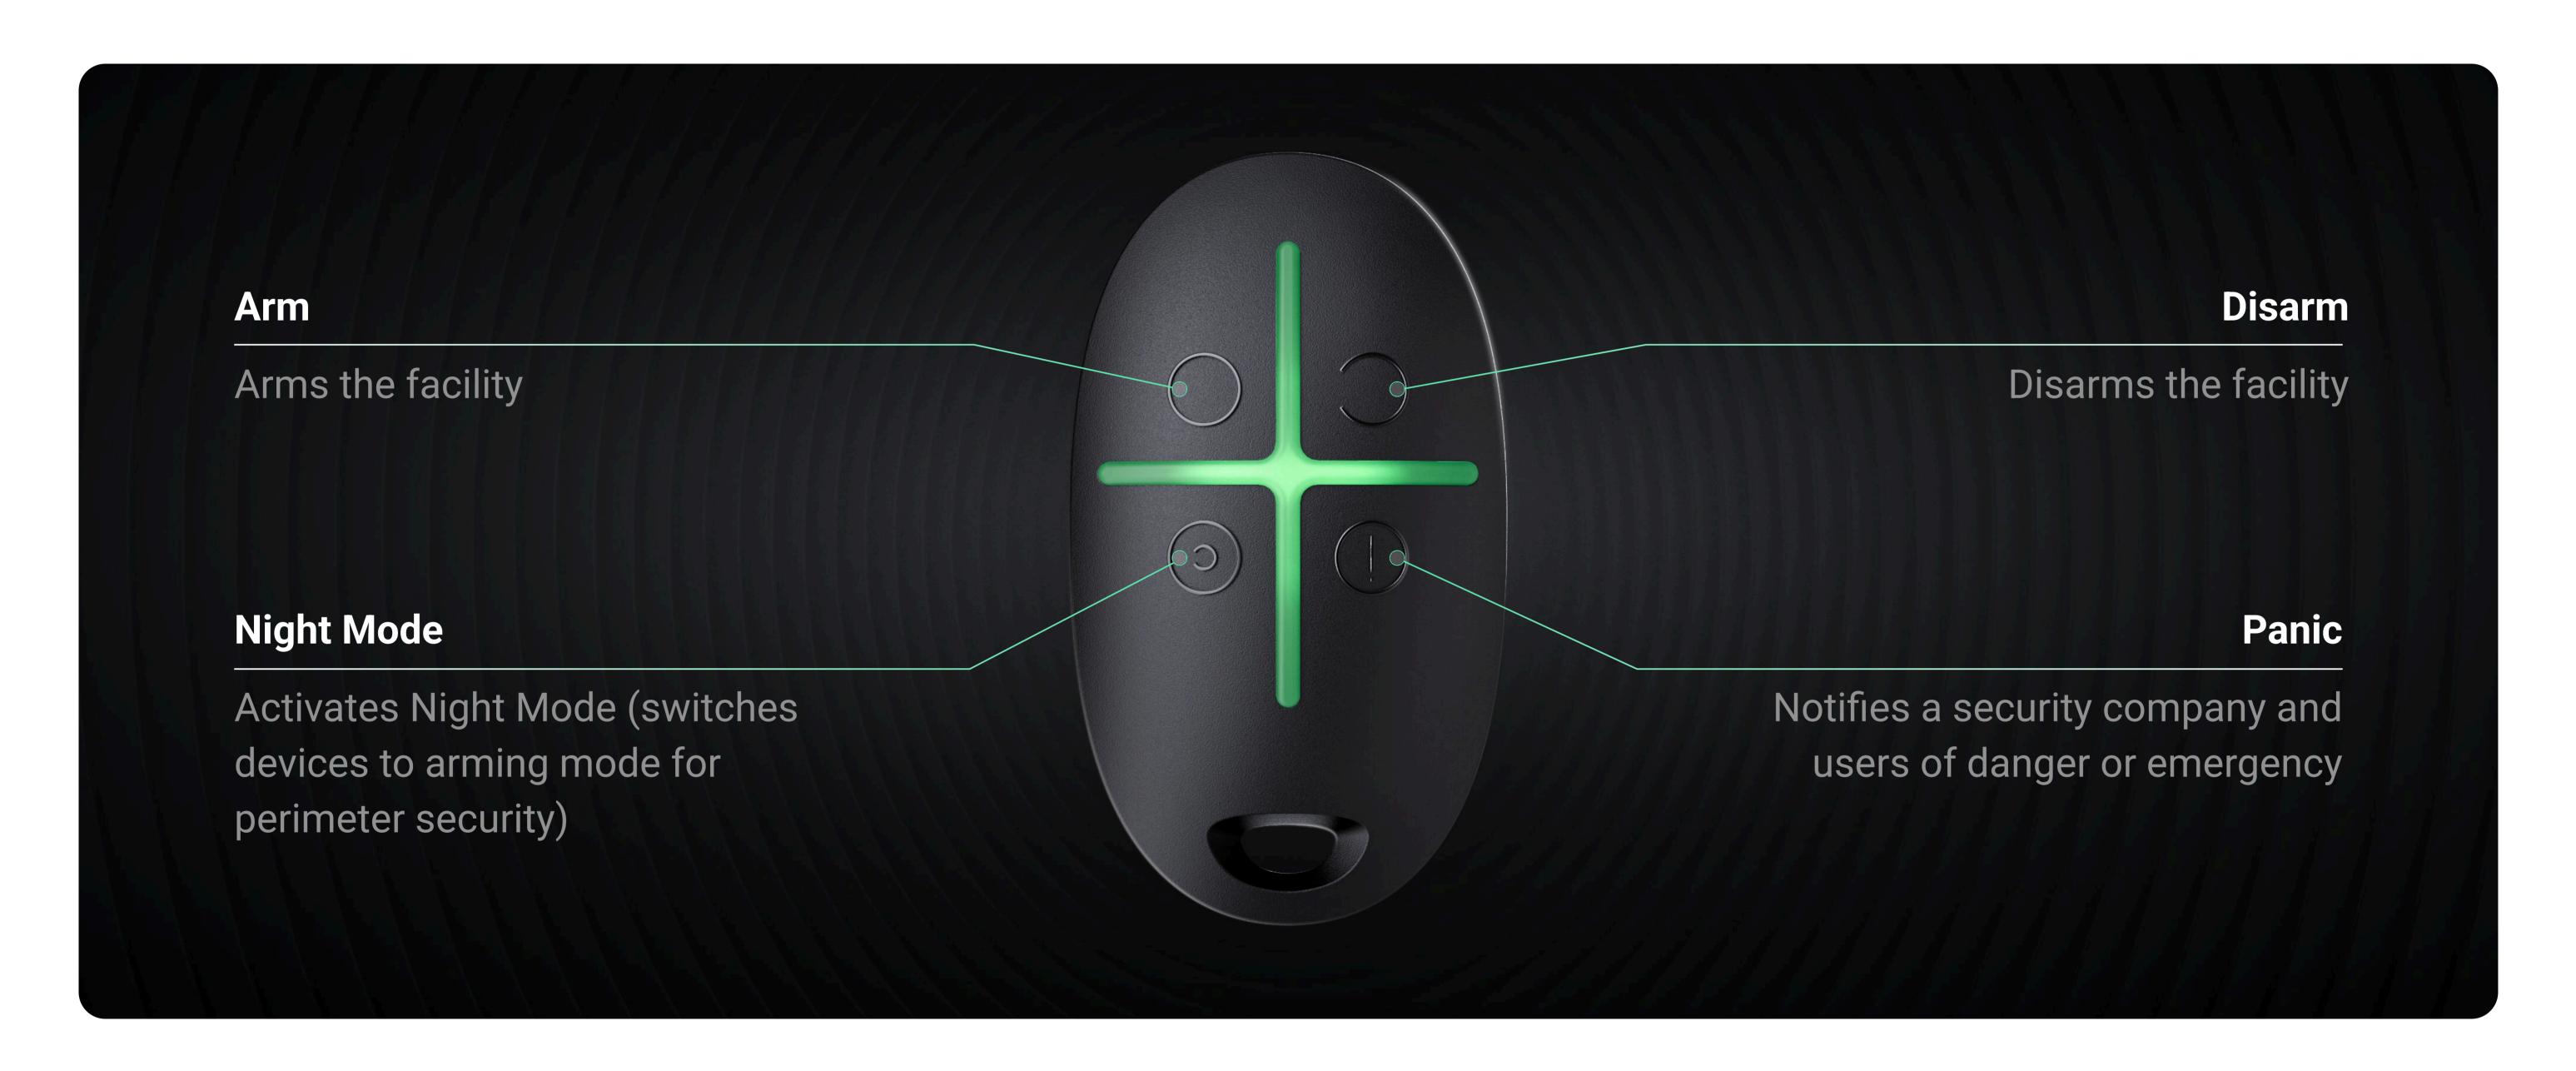

Protection against accidental activation: double or long press



Jeweller


communication technology

- Up to 1,300 m (4,250 ft) of radio communication in an open space
- Encryption and device authentication to prevent spoofing
- LED indication of button pressing



Flawless autonomy

- Up to 5 years of autonomous operation
- Pre-installed replaceable battery
- Notifications of low battery charge

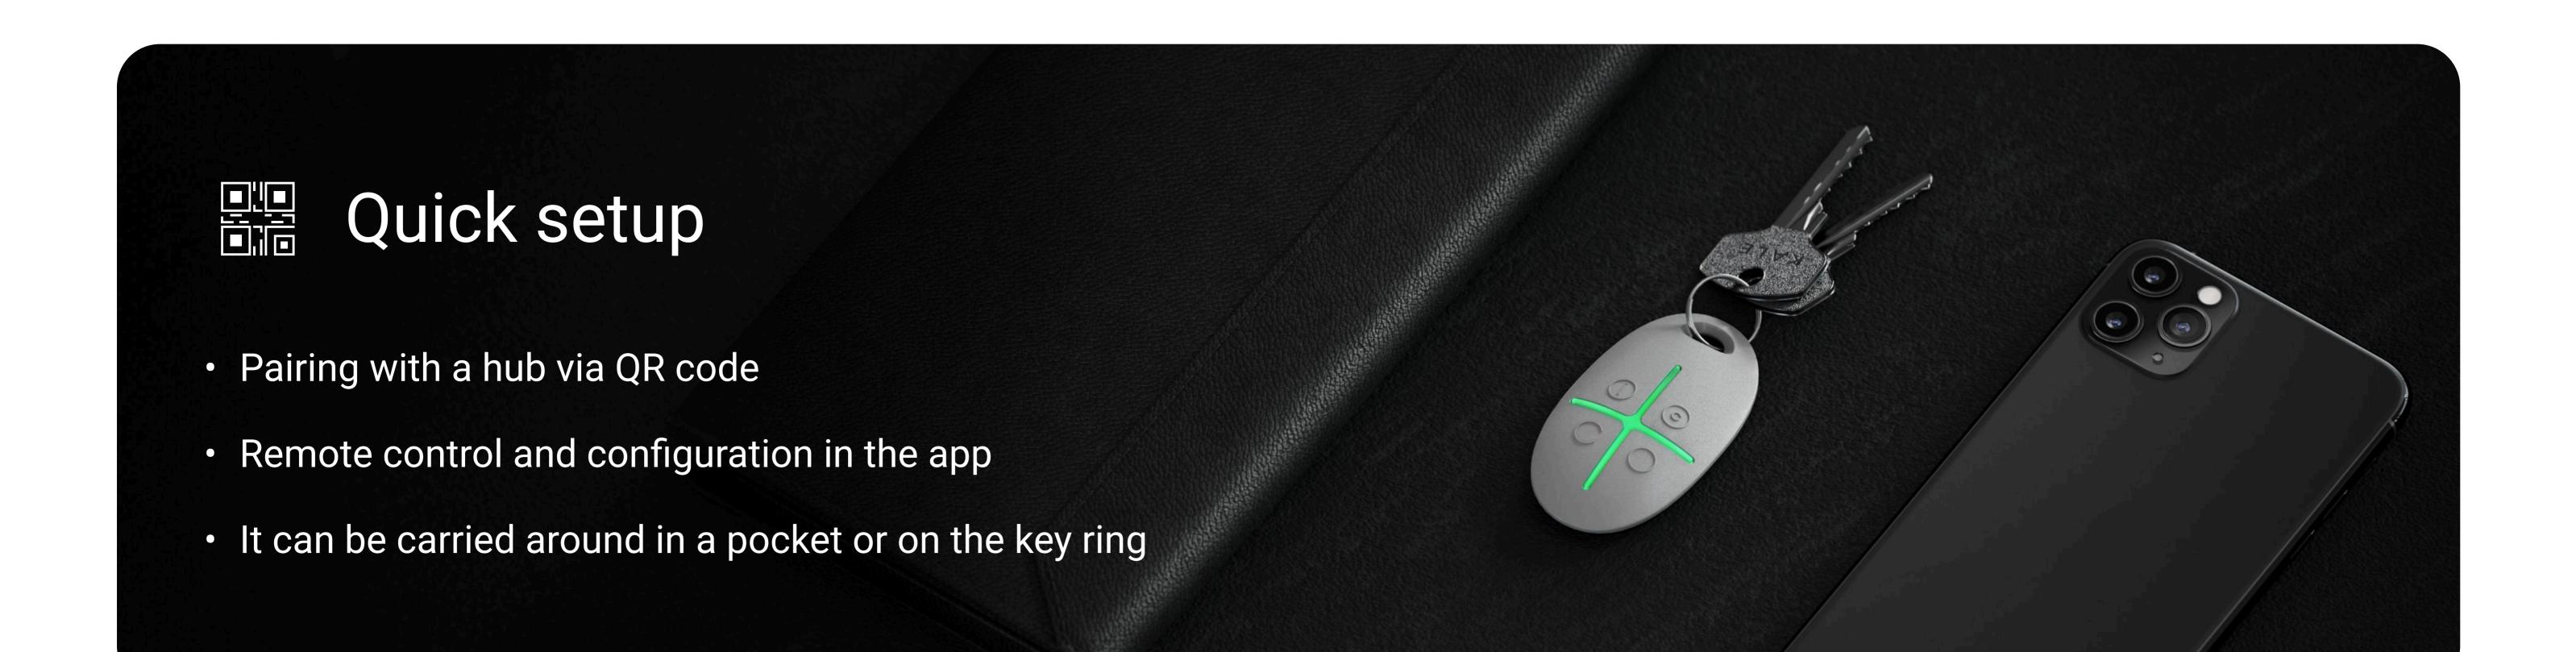

Compliance	Compatibility	Communication with a hub	Power supply
EN 50131 (Grade 2)	Hubs	Jeweller communication	Battery
PD 6662:2017	Hub Plus Jeweller	technology	1 × CR2032
NFA2P	Hub 2 (2G) Jeweller	Fraguenay banda	Pre-installed.
SIA CP-01	Hub 2 (4G) Jeweller	Frequency bands	
	Hub Hybrid (2C)	866.0-866.5 MHz 868.0-868.6 MHz	Battery life
	Hub Hybrid (2G) Hub Hybrid (4G)	868.7–869.2 MHz	up to 5 years
	riub riybriu (+0)	905.0-926.5 MHz	
	Range extenders	915.85-926.5 MHz	
	ReX, ReX 2	921.0-922.0 MHz	
		Depends on the region of sales.	
		Jeweller communication range	
		up to 1,300 m	
		up to 4,250 ft	
		In an open space.	
Installation	Enclosure	Complete set	
Operating temperature range	Color	Ajax SpaceControl S Jeweller	
from -10 °C to +40 °C	Black	1 × CR2032 battery	
from 14 °F to 104 °F	White	(pre-installed)	
		Quick start guide	
Operating humidity	Dimensions		
up to 95%	65 × 37 × 10 mm		
Protection class	2,56" × 1,46" × 0,39"		
i iototioni diass			



IP32











For detailed information, scan the QR code or follow the link:

Weight

0,46 oz

13 g