

FLOOR MOUNTED DOOR HOLDERS

- ROBUST ALUMINIUM CONSTRUCTION
- 200N OR 500N HOLDING FORCE
- MANUAL RELEASE SWITCH
- SURFACE CABLE ENTRY
- SUPPLIED WITH KEEPER PLATE
- APPROVED TO EN1155 AND CE MARKED



Floor Mounted door holders are designed to hold open fire doors for ease of access and release them when an alarm is triggered. They are ideally suited to applications where maximum protection is needed against vandalism or accidental damage, such as prisons and schools. They are also suited to applications where the door is not opening near a wall. They feature a rugged cast aluminum housing, a holding magnet with integral ejection pin and a manual release switch. Cable entry can be through the base or through a 20mm hole provided in the housing for surface mounted conduit or pyro.


Versions are available to give 200N or 500N holding force in standard and vandal resistant form. They are also available in low wattage versions, heavy duty switch versions and alternative keeper designs and voltages. Every door holder is supplied complete with a door mounting keeper plate.

TECHNICAL INFORMATION

	Standard version	High force version
Holding force	200N	500N
Residual	zero	zero
Supply voltage	24Vdc	24Vdc
Consumption	45mA	90mA
Finish	Aluminium white painted housing, zinc plated magnet	
Weight	700g	1000g

200N Version

Part Number : 3-84-0301

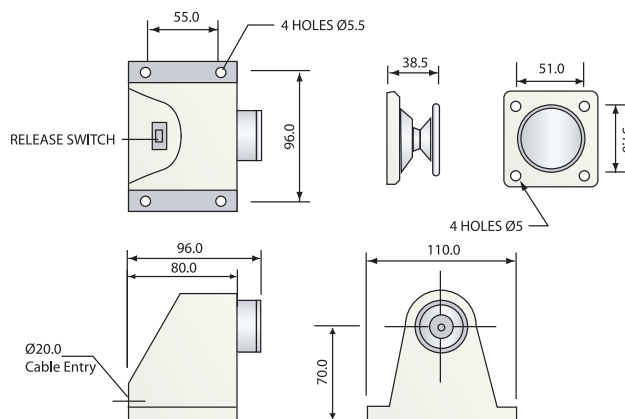

500N Version

Part Number : 3-84-0501

